


Description

ODF-E is used connecting optical fiber and equipment of central office. 19" 1U 24 core standards, the patch panel is removable for operation and maintenance. The front panel can install SC and FC adapter. It is mainly used in the Telecom, CATV equipment room and network equipment room.

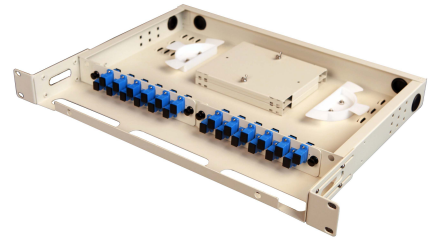

Optical fibers storage set: residual fiber length no less 1.6m

Residual fiber curvature radius no less than 37.5m

Specifications

Model	Size(mm)	Max. Core Capacity	splice tray	Weight(kg)
ODF-E-24C	485x300x46	48 LC, 24 SC, 24 ST or 24 FC	12, 24	3.5

--end--